




Datasheet DELTAPURE® Swab DZ-125VPCTS

125 mm Polyester Cleanroom Swab

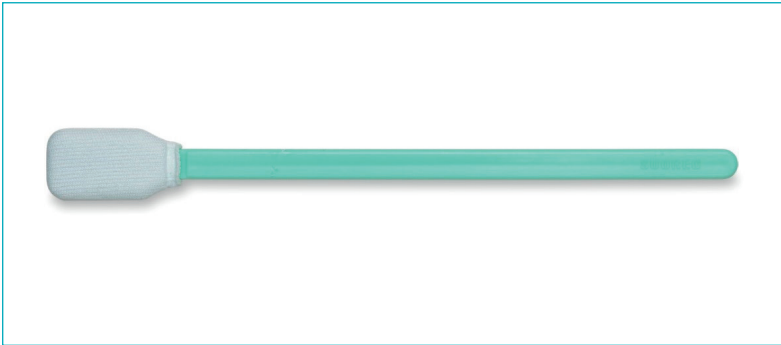

Product Informations

Applications

DELTAPURE® polyurethane foam and polyester swabs are designed for precision surface cleaning and application of liquid lubricants in cleanroom environments. These swabs are manufactured in ISO Class 5 cleanroom using patent processes that produce high quality swabs capable of meeting the strictest requirements of industries such as semiconductor, flat panel display, microelectronics, biotechnology and health care.

Benefits

- Absorbent and chemical resistant
- Low levels of particles and extractables
- Compatible with IPA and many cleaning solvents
- Excellent for applying lubricants and other liquids
- Suitable for cleaning sensitive surfaces

Product Specifications

Material	
Swab head	Knitted polyester
Swab handle	Polypropylene
Dimensions	
Total swab length	125 mm
Swab head	25 mm (L) x 12.7 mm (W) x 4.2 mm (Thickness)
Swab handle	100 mm (L) x 5.5 mm (W) x 2.8 mm (Thickness)
Head shape	Flat

Order Information

Number	Product	Inner bag	Bag	Case
DZ125VPCTS	DELTAPURE® Swab DZ-125VPCTS		100 swabs	50 bags (5'000 swabs)



Datasheet DELTAPURE® Swab DZ-125VPCTS

125 mm Polyester Cleanroom Swab

Technical Data

Contamination Characteristics

Property	Value	Test method
Particle counts - LPC $\geq 0.5 \mu\text{m}$	3'115 counts/tip	IEST-RP-CC004.3\6.1.4
Non volatile residue (NVR) - IPA extractant	0.12 mg/tip	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Chloride (Cl ⁻)	< 0.11 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.2.2
Extractable counts (Ions) - Sulfate (SO ₄ ²⁻)	< 0.14 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Nitrate (NO ₃ ⁻)	< 0.02 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Phosphate (PO ₄ ³⁻)	< 0.01 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Fluoride (F ⁻)	< 0.01 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Potassium (K ⁺)	< 0.02 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Calcium (Ca ⁺⁺)	< 0.04 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Sodium (NA ⁺)	< 0.13 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
Extractable counts (Ions) - Magnesium (Mg ⁺⁺)	< 0.02 $\mu\text{g}/\text{tip}$	IEST-RP-CC004.3\7.1.2
FTIR	No silicone, amide and DOP detected	

Date

12/2019